


Lightning Counter

Lightning Event Counter

LEC-A

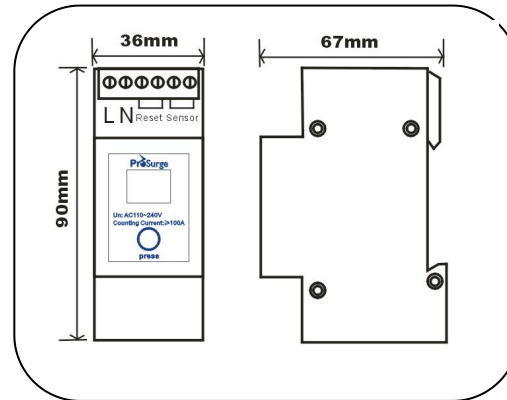

Dimension

LEC-A lightning event counter is used for register the lightning event in a certain area.

- Potential-free registration of discharge currents of surge protective device
- Sensitive response
- Stable capability, strongly anti-jamming
- Din rail design, easy to install and use
- Easy installation by enclosing the earth conductor of the arrester with an open toroidal core
- Voltage or current counting alternative is available
- 3 digital LCD display with setting and resetting buttons
- AC online charging to the battery

Type	HIT-LEC-A
Nominal Voltage	AC: 220V
Sensitivity Current (one cycle, 50Hz)	4~6A
Display Model	LCD
Indicator	Lightning Event 0~999
Reset	short-circuit tow terminals of "RESET"
Current Sample Mode	Inductive Probe
Working mode	Battery service life> 3month without AC power
Operation temperature (°C)	-20~+60
Mounting on	35 mm DIN rail
Dimension of counter (mm)	150x80.5x36,2 modules, DIN 43880
Screw torque	0.2Nm
Enclosure material	thermoplastic; extinguishing degree UL94 V-0

Installation:

